

# T2025 (T25)

Compact, Series 2  
30 hp maximum

## 13.495€\*

\*excl. BTW & frontlader



**TYM**  
ZUID-KOREA

**CNUDD E**  
BV



# A sub-compact tractor engineered for productivity inside and out


The T2025 tractor is proof that great things can indeed come in small packages. Offering enhanced power without sacrificing maneuverability, it's equipped with a powerful engine and ergonomic operator controls, ensuring both performance and comfort.



Foldable ROPS



1. 2-range hydrostatic transmission (HST)



3. 2 USB ports



2. 3rd function hydraulic valve



4. Independent electro-hydraulic PTO switch



5. Wireless smartphone charger



6. Wide loadspace with toolbox



### Superior operator amenities

Fully equipped with modern amenities to maximize operator comfort, this tractor is complete with a large cup holder, wireless smartphone charging dock, multiple USB ports to charge personal devices and a Bluetooth speaker. These features are designed to promote productivity, keeping drivers hydrated, connected, and alert during every job.




### 3-point hitch with powerful lift capacity

The 3-point linkage on the rear has an impressive 850kg lift capacity that reaches the end ball joint. The rear PTO control can be used to adjust rpm based on the task, increasing it for more intensive applications like slashing and digging.



### High torque, water-cooled Yanmar diesel engine

The Yanmar engine offers more torque with fewer revs compared to competitors in its class. Since it is water-cooled, the engine warms up faster and stabilizes temperature more effectively while the tractor is running. The engine is Stage V certified as it matches environmental and noise emission standards without electrics.

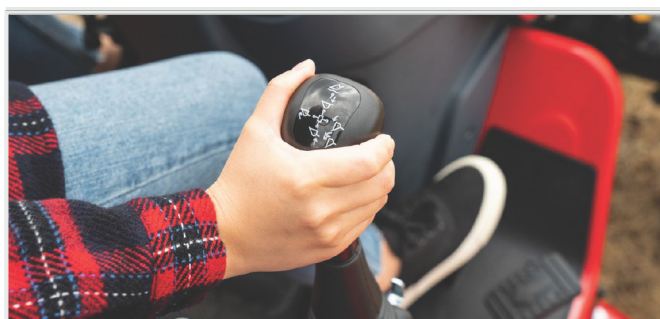

### 3rd function hydraulic valve to enhance attachment capabilities

Allowing for versatile attachment handling, this tractor comes ready with a 3rd function installation kit. It can maximize the use of a bucket attachment with 4-in-1 functionality, including lifting, tilting, dumping, and grappling.



### High-capacity fuel tank for time-intensive work

The high-capacity fuel tank allows the tractor to operate for longer periods without stopping to refuel. Paired with a fuel-efficient engine, this enables uninterrupted and efficient operations during the busiest seasons.



### Upgraded detailing to reduce operator effort

Packed with value-added features to enhance ease of operation, including a new fuel cap design to enhance grip and reduce manual effort and a brighter meta panel engineered to enhance operator awareness.

# Technical specifications T2025 (T25)

| ENGINE                         |                        |
|--------------------------------|------------------------|
| Engine manufacturer            | Yanmar 3TNV80F-NXD     |
| Type                           | Natural aspiration     |
| engine Engine power nominal    | 18.4 kW                |
| Engine power maximum           | 30 hp                  |
| Rated engine speed             | 3000 rpm               |
| No. of cylinders               | 3                      |
| Displacement                   | 1267 cc   77.3 cu. in. |
| Air cleaner                    | Single dry             |
| Alternator                     | 12V, 40 A              |
| Fuel system                    | IDI                    |
| POWERTRAIN                     |                        |
| Transmission type              | HST                    |
| No. of speeds                  | Infinite 2-Range       |
| Max. traveling speed           | 24 km/h                |
| Brakes                         | Wet disc               |
| Steering                       | Hydrostatic            |
| Clutch                         | N/A                    |
| CAPACITIES                     |                        |
| Fuel tank                      | 25 L                   |
| Coolant                        | 3.6 L                  |
| Crankcase                      | 2.7 L                  |
| Transmission/Hydraulics system | 17 L                   |
| Front axle                     | 4.5 L                  |



**Hoekstraat 179, 9160 Eksaarde - Lokeren. België**

**+32 (9) 355 56 29**

**info@garagecnudde.be www.garagecnudde.be**

bezoek onze nieuwe website **www.tymtractors.be**

| PTO                                  |                                |         |
|--------------------------------------|--------------------------------|---------|
| PTO type                             | Independent                    |         |
| PTO control                          | Electric/Hydro                 |         |
| PTO rear                             | 540 rpm                        |         |
| HYDRAULIC SYSTEM                     |                                |         |
| Pump type                            | Single gear pump               |         |
| Implement flow                       | 15.8 L/min                     |         |
| Steering flow                        | 10.5 L/min                     |         |
| Total flow                           | 26.3 L/min                     |         |
| Category, 3-point hitch I            | I                              |         |
| Hitch lift capacity                  | 850 kg                         |         |
| Frontloader lift capacity            | 1000 kg                        |         |
| Lift control type                    | Position                       |         |
| No. of standard remote valves        | 1                              |         |
| DIMENSIONS & WEIGHTS                 |                                |         |
| Overall length with 3-point hitch    | 2829 mm                        |         |
| Overall width                        | 1384 mm                        |         |
| Wheelbase                            | 1550 mm                        |         |
| Height to top of ROPS                | 2505 mm                        |         |
| Height to top of cabin               | 2200 mm                        |         |
| Min. ground clearance                | 267 mm                         |         |
| Min. turn radius with brakes         | 2602 mm                        |         |
| Min. turn radius without brakes      | 2782 mm                        |         |
| Weight with ROPS                     | 1100 kg                        |         |
| Maximum weight with trailer          | 4688 kg                        |         |
| STANDARD TIRES                       |                                |         |
| R1 Agricultural - Front / Rear       | 6-12 4PR / 9.5-20 6PR          | 1280 mm |
| R3 Turf - Front / Rear               | 25x8.5-14 6PR / 36x13.5-15 4PR | 1400 mm |
| R4 Industrial - Front / Rear         | 23x8.5-12 4PR / 12-16.5 6PR    | 1400 mm |
| Galaxy Pro (optional) - Front / Rear | 200/70 R16 / 320/70 R20        | 1400 mm |