

T3048 (F50)

Compact, Series 3
50 hp Maximum

19.995€ *

*excl. BTW, cabine en frontlader




TYM
ZUID-KOREA

CNUDD E
BV



Packed with features to help accomplish your goals


Compact enough to give you the versatility you need, and powerful enough to take on the tougher jobs on and off the field.




1. New iconic hood




2. Comfortable suspension seat




3. Ergonomic lever

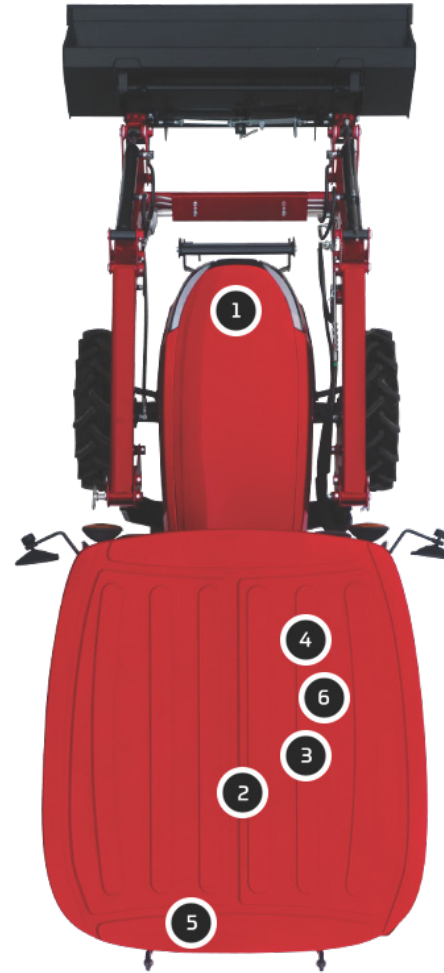


4. Highly responsive forward & reverse HST



5. High-capacity fuel tank



6. Front-end loader joystick lever

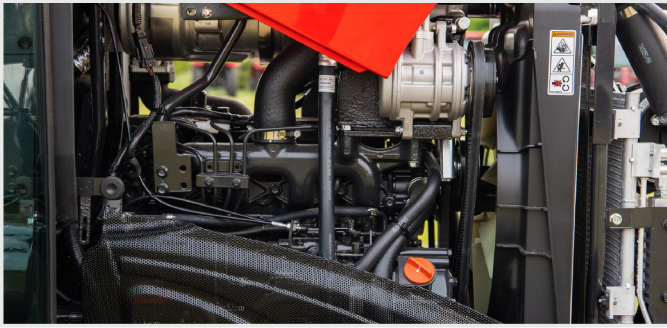

Eco-friendly TYM cylinder Stage V engine

Equipped with a naturally aspirated engine designed and manufactured by TYM, the tractor is designed to be eco-friendly and fuel-efficient but makes no compromise on performance and reliability.



Tilt steering wheel

The tilt steering wheel allows operators to adjust the position of the steering wheel for a more comfortable driving experience.



Cruise control (HST)

The cruise control function allows you to maintain RPM at your preferred setting, regardless of the tractor's load conditions.




LED work light (Optional)

Full front & rear LED work lights facilitate safer operations, particularly in low visibility conditions such as rainy or dusty work environments.



Enhanced implement controls for efficient operation

Equipped with a range of controls and two sets of rear remote valves to increase productivity and work speed. Control implement lowering speed and depth with the implement lowering speed dial and draft control levers.

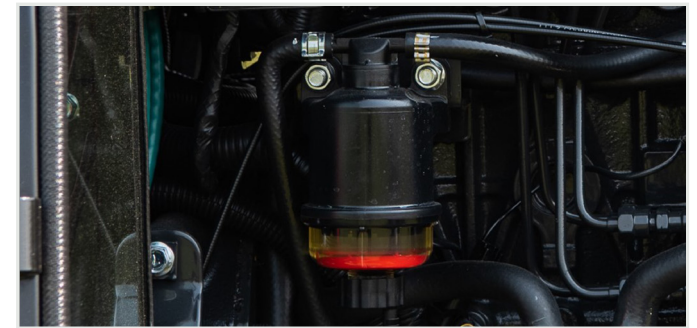

Water-separating fuel filter

The water-separating fuel filter prevents foreign substances from entering the fuel, ensuring better engine start ability and preventing damage to the machine.

Technical specifications T3048 (F50)

ENGINE	
Engine manufacturer	TYM A2300N4-ETC-5
Type	Natural Aspiration
Engine power nominal	35,3 kW
Engine power maximum	50 hp
Rated engine speed	2600 rpm
No. of cylinders	4
Displacement	139.5 cu. in. 2287 cc
Air cleaner	Dry Element
Alternator	12V, 70A
Fuel system	Water-cooled Diesel
POWERTRAIN	
Transmission type	HST
No. of speeds	3-Range
Max. traveling speed	30 km/h
Brakes	Wet, Multi-disc
Steering	Hydrostatic
Clutch	Dry Single Plate
CAPACITIES	
Fuel tank	27 L
Coolant	5.9 L
Crankcase	4.8 L
Transmission/Hydraulics system	37 L
Front axle	6.4 L



Hoekstraat 179, 9160 Eksaarde - Lokeren. België

+32 (9) 355 56 29

info@garagecnudde.be www.garagecnudde.be

bezoek onze nieuwe website **www.tymtractors.be**

PTO	
PTO type	Independent
PTO control	Electric/hydro
PTO rear	540 / 540E
HYDRAULIC SYSTEM	
Pump type	Gear Pump
Implement flow	43.2 l/min
Steering flow	18.9 l/min
Total flow	62.1 l/min
Category, 3-point hitch	I
Hitch lift capacity	1500 kg
Frontloader lift capacity	1600 kg
Lift control type	Position/Draft
No. of standard remote valves	4
DIMENSIONS & WEIGHTS	
Overall length with 3-point hitch	3429 mm
Overall width	1325 mm
Wheelbase	1670 mm
Height to top of ROPS	2255 mm
Min. ground clearance	343 mm
Min. turn radius without brakes	2735 mm
Weight without cab	1550 kg
Maximum weight with trailer	6060 kg
STANDARD TIRES	
R1 Agricultural - Front / Rear	7-16, 6PR / 11.2-24, 8PR 1300 mm
R3 Turf - Front / Rear	27x8.5-15, 6PR / 41x14.00-20, 4PR 1400 mm
R4 Industrial - Front / Rear	10-16.5 / 420/70-24 1500 mm
Galaxy Pro (optional) - Front / Rear	280/70R16 / 360/70R24 1400 mm